



BAUER SOLARTECHNIK

## PREMIUM PROTECT

BS-132M10HBB 495 - 505 W

GLASS/GLASS - WHITE GRID - BLACK FRAME



# BS-132M10HBB-GG



### PERFORMANCE GUARANTEE

30 years of product warranty and a linear performance guarantee over a period of 30 years



### CERTIFICATION

Permanent in-house quality control, multiple certifications by accredited inspection bodies



### EFFICIENCY

High efficiency for optimum yield - innovations directly influence the production process



### POSITIVE POWER TOLERANCE

Exclusive delivery of solar modules with positive power tolerance only



### BIFACIAL TECHNOLOGY

Double-sided solar cells and a transparent back side increase the potential power output by up to 30%



### WEATHERPROOF

Standardized mechanical load test guards against damage from wind and weather



### GERMAN GUARANTOR

In case of need it is ensured that a German company assumes the claim settlement



### SAFETY

High-quality components ensure maximum protection in all weather conditions



### PID TEST

The solar cells of our high performance modules are tested for PID




### REINSURANCE COVERAGE

BAUER has reinsured the performance guarantee with a german insurance company for 30 years

PROVEN & GUARANTEED BY  
**BAUER SOLARTECHNIK**  
HIGH QUALITY GERMAN STANDARDS

MECHANICAL DATA	
Module dimensions	2093 x 1133 x 35 mm
Weight	30.0 kg
Frame	Anodized aluminium alloy (black)
Frontside	Anti-reflection safety glass, semi-toughened, 2 mm
Embedding material	EVA
Backside	Anti-reflection safety glass, semi-toughened, 2 mm
Solar cells	132 monocrystalline bifacial half-cells
Bifaciality	70% (bifaciality coefficient = $P_{\max}$ backside (STC) / $P_{\max}$ frontside (STC), tolerance: $\pm 10\%$ )
Connection	IP $\geq 68$ , 3 bypass diodes
Cable & connector	1x4 mm <sup>2</sup> , 1300 mm, MC4 compatible

WARRANTY CONDITIONS <sup>2</sup>	
Product warranty	30 years
Performance guarantee	30 years (min. 87,4% after 30 years)
OPERATIONAL CONDITIONS	
Operating temperature	-40 to 85°C
Static load	5400 Pa (snow/wind/ice)
Hail	$\varnothing$ 25 mm at 23 m/s
QUALIFICATION & CERTIFICATION	
IEC 61215, IEC 61730, Fire Class A IEC 61730-2	
PACKAGING UNITS	
Modules per container	660 pcs

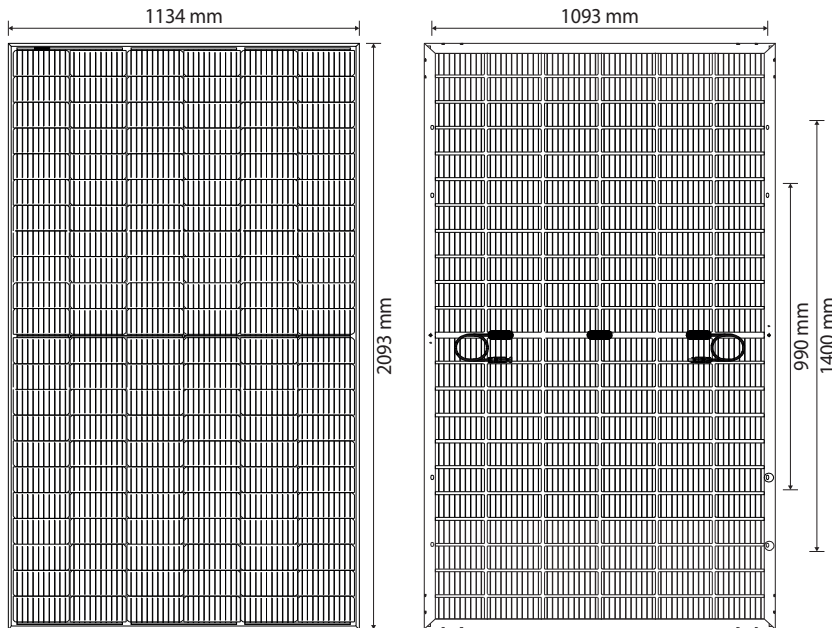

BAUER SOLARTECHNIK  
**PREMIUM PROTECT**  
 BS-132M10HBB 495 - 505 W



ELECTRICAL DATA <sup>1</sup>		BS-495-132M10HBB-GG	BS-500-132M10HBB-GG	BS-505-132M10HBB-GG
Maximum power	$P_{\max}$ (W)	495	500	505
Power output tolerance	$P_{\max}$ (%)	0 ~ +3	0 ~ +3	0 ~ +3
Open circuit voltage	$V_{oc}$ (V)	45.20	45.40	45.60
Short circuit current	$I_{sc}$ (A)	13.85	13.93	14.00
Voltage at max. power	$V_{mpp}$ (V)	38.20	38.40	38.60
Current at max. power	$I_{mpp}$ (A)	12.96	13.03	13.09
Module efficiency	$\eta_m$ (%)	20.87	21.08	21.30
Nominal operating cell temperature	NOCT (°C)	45 $\pm$ 2		
Temperature coefficient of $V_{oc}$	$T_k (V_{oc})$	-0.270 %/°C		
Temperature coefficient of $I_{sc}$	$T_k (I_{sc})$	+0.048 %/°C		
Temperature coefficient of $P_{mpp}$	$T_k (P_{mpp})$	-0.320 %/°C		
Maximum system voltage DC (TÜV)	(V)	1500		
Maximum series fuse rating	(A)	20		
Bifaciality performance increase:*	10% $P_{mpp}$ (W)	544 (+49)	550 (+50)	555 (+50)
	20% $P_{mpp}$ (W)	594 (+99)	600 (+100)	606 (+101)
	30% $P_{mpp}$ (W)	643 (+148)	650 (+150)	656 (+151)

<sup>1</sup>Values under Standard Test Conditions (STC): air mass 1,5 AM, irradiance 1000 W/m<sup>2</sup>, cell temperature 25°C. STC measuring tolerance:  $\pm 3\%$  ( $P_{\max}$ ),  $\pm 10\%$  ( $V_{\max}$ ,  $I_{mpp}$ ,  $V_{oc}$ ,  $I_{sc}$ ). <sup>2</sup>Nominal value is specified in the written warranty conditions. A possible light-induced degradation in power is not taken into account. The beneficiary under the reinsurance policy of MunichRe is solely Bauer Energiekonzepte GmbH. Please contact us to get information on how this insurance coverage benefits you as a customer. Note: Please read safety instructions and installation manual before using this product. Subject to change. © 2023 Bauer Solar GmbH. Effective 4th of April 2023.

