



TOP CON N - TYPE M10

BAUER SOLARTECHNIK

COMMERCIAL

BS-132M10HBW-GG 515 - 525 W

BIFACIAL GLASS-GLASS HALF-CELL MODULE

GERMAN MADE



GRADE "A" N-TYPE BIFACIAL HALF CELLS

Only Grade "A" half-cells are used in the production of all BAUER solar modules and only the blackest are selected. Up to 30% increase in yield through bifacial cells active on both sides and a glass backside.



LOW LIGHT PERFORMANCE

Stronger performance in low lighting conditions than PERC modules, such as overcast days, mornings and evenings helping to ensure a higher energy output than PERC every day.



STABILITY & DURABILITY

2 x 2 mm tempered anti-reflective solar glass; dirt-repellent, scratch-resistant, durable and shock-proof.



CERTIFICATION

Constant in-house quality controls - certified several times over by accredited inspection bodies.



FIRE CLASS A

Maximum fire protection through double glazing according to the highest security requirements.



WARRANTY & GUARANTEE

30 year product warranty and a linear performance guarantee over a period of 30 years.




GERMAN GUARANTOR

If necessary, it is guaranteed that a German company takes over any claim settlements.



REINSURANCE COVERAGE


BAUER is re-insured with Munich RE for 15 years of the product warranty & 30 years of the performance guarantee.

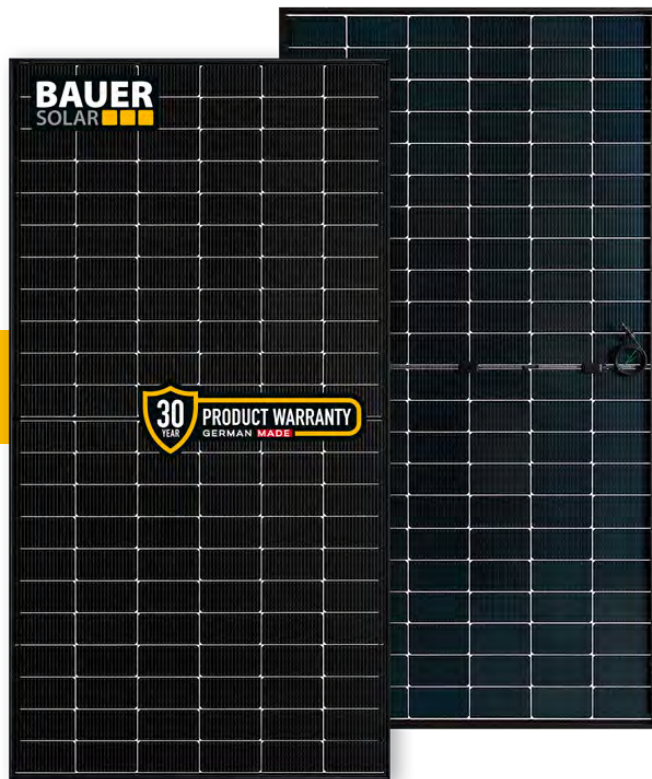


BAUER GUARANTEE +

Our extended guarantee covers the module guarantee and a lump-sum compensation for the replacement of a defective module (Guarantee conditions as of 01.12.2023).

BAUER guarantees a minimum performance value of 87.4% after 30 years for the **COMMERCIAL** glass-glass solar modules.

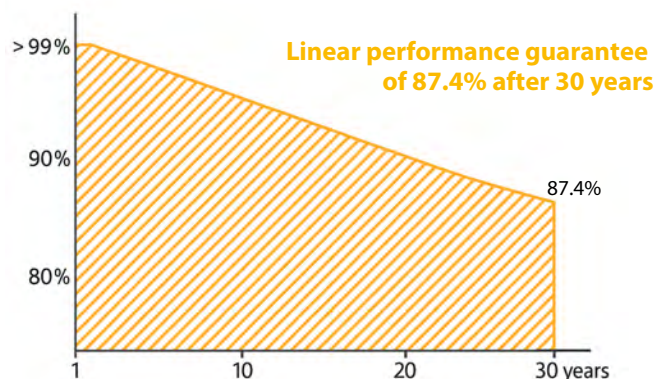

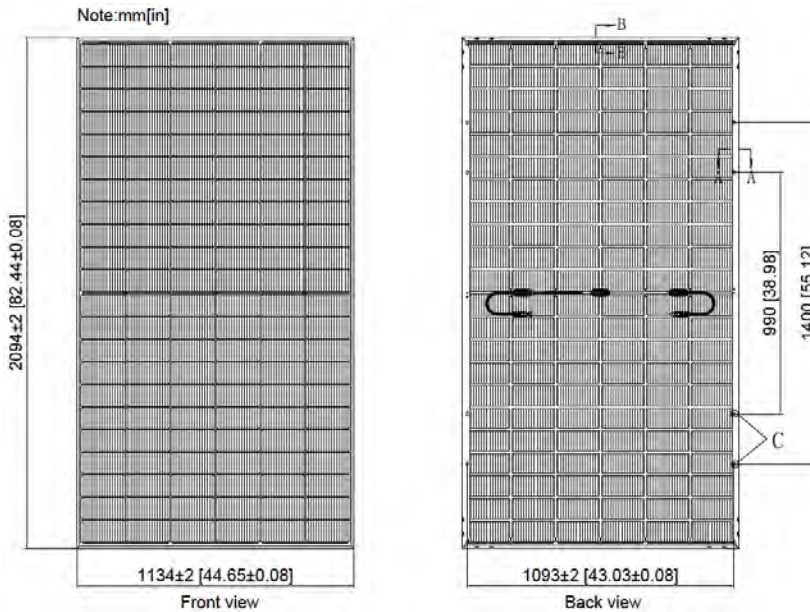


Module dimensions	2094 x 1134 x 30 mm
Weight	29.2 kg
Frame	Black anodized aluminum profile
Frontside	AR-coating semi-toughened glass, 2 mm
Embedding material	EVA
Backside	White-glazed & semi-toughened glass, 2 mm
Solar cells	132 monocrystalline N-type bifacial half-cells
Bifaciality	80 % ± 10 %
Junction box(es)	IP68, 3 bypass diodes
Cable & connector	1x4 mm ² , 1300 mm, Stäubli MC4/EVO2A

BAUER SOLARTECHNIK

COMMERCIAL

BS-132M10HBW-GG 515 - 525

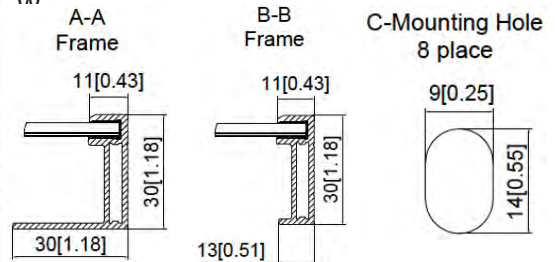

WARRANTIES¹

30 year product warranty

30 year performance guarantee

OPERATING CONDITIONS

Operating temperature	-40 to 85°C
Static load	5400 Pa (snow/wind/ice)
Hail test	Ø 25 mm at ~ 23 m/s

CERTIFICATION

IEC 61215, 61730-1/2, 61701 (Salt mist), 62716 (Ammonia)
CSA; Fire Class: A (USA); UL Type 29

PACKAGING

Modules per pallet	35
Pallets/modules per truck	22/770

ELECTRICAL CHARACTERISTICS²

		BS-515-132M10HBW-GG	BS-520-132M10HBW-GG	BS-525-132M10HBW-GG
Maximum power	P _{max} (W)	515	520	525
Power output tolerance	P _{max} (%)	0 ~ +3	0 ~ +3	0 ~ +3
Open circuit voltage	V _{oc} (V)	46.63	46.80	46.96
Short circuit current	I _{sc} (A)	14.08	14.17	14.25
Voltage at maximum power	V _{mpp} (V)	38.62	38.78	38.93
Current at maximum power	I _{mpp} (A)	13.34	13.42	13.49
Module efficiency	η _m (%)	21.69	21.90	22.11
Bifaciality performance increase*	10 % P _{mpp} (W)	566.5 (+51.5)	572 (+52)	577.5 (+52.5)
	20 % P _{mpp} (W)	618 (+103)	624 (+104)	630 (+105)
	30 % P _{mpp} (W)	669.5 (+154.5)	676 (+156)	682.5 (+157.5)
Nominal operating cell temperature	NOCT (°C)	45 +/- 2		
Temperature coefficient of V _{oc}	T _k (V _{oc})	-0.26 %/°C		
Temperature coefficient of I _{sc}	T _k (I _{sc})	+0.046 %/°C		
Temperature coefficient of P _{mpp}	T _k (P _{mpp})	-0.30 %/°C		
Maximum system voltage DC (TÜV)	(V)	1500		
Maximum series fuse rating	(A)	30		

*depending on Albedo and irradiation conditions at installation site

¹Nominal value is specified in the written warranty conditions. A possible light-induced degradation in performance is not taken into account.

²Values under Standard Test Conditions (STC): air pressure 1.5 AM, irradiance 1000 W/m², cell temperature 25°C. STC measuring tolerance: ±3 % (P_{max}), ±10 % (V_{mpp}, I_{mpp}, V_{oc}, I_{sc}). The beneficiary under the reinsurance policy is solely Bauer Solar Engineering GmbH. Please contact us to get information on how this insurance coverage benefits you as a customer.

Note: please read the installation manual before using this product. Subject to change.

© 2024 Bauer Solar Engineering GmbH. Effective: 01/12/24.