



TOP CON N - TYPE M10

BAUER SOLARTECHNIK

## COMMERCIAL

BS-144M10HBW-GG 575 - 585 W

BIFACIAL GLASS-GLASS HALF-CELL MODULE

GERMAN MADE



### GRADE "A" N-TYPE BIFACIAL HALF CELLS

Only Grade "A" half-cells are used in the production of all BAUER solar modules and only the blackest are selected. Up to 30% increase in yield through bifacial cells active on both sides and a glass backside.



### LOW LIGHT PERFORMANCE

Stronger performance in low lighting conditions than PERC modules, such as overcast days, mornings and evenings helping to ensure a higher energy output than PERC every day.



### STABILITY & DURABILITY

2 x 2 mm tempered anti-reflective solar glass; dirt-repellent, scratch-resistant, durable and shock-proof.



### CERTIFICATION

Constant in-house quality controls - certified several times over by accredited inspection bodies.



### FIRE CLASS A

Maximum fire protection through double glazing according to the highest security requirements.



### WARRANTY & GUARANTEE

30 year product warranty and a linear performance guarantee over a period of 30 years.




### GERMAN GUARANTOR

If necessary, it is guaranteed that a German company takes over any claim settlements.



### REINSURANCE COVERAGE


BAUER is re-insured with Munich RE for 15 years of the product warranty & 30 years of the performance guarantee.

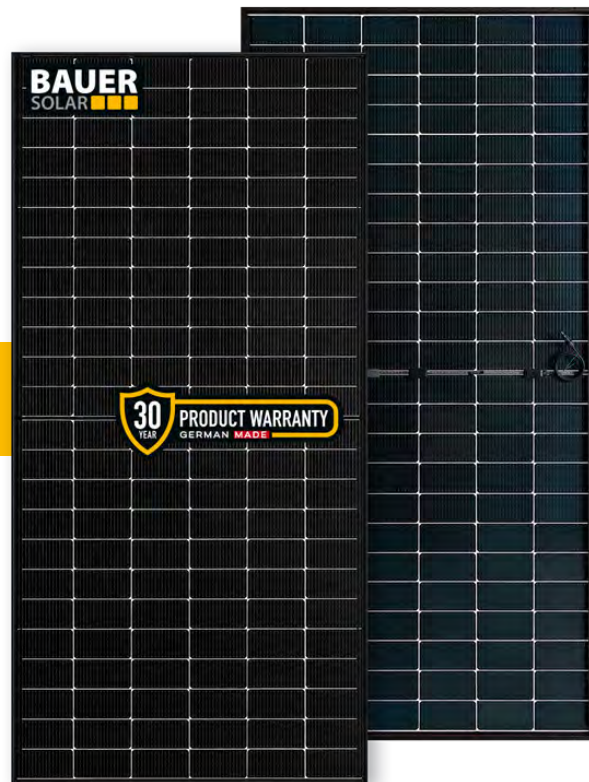

## BAUER GUARANTEE +


Our extended guarantee covers the module guarantee and a lump-sum compensation for the replacement of a defective module (Guarantee conditions as of 01.12.2023).

BAUER guarantees a minimum performance value of 87.4% after 30 years for the **COMMERCIAL** glass-glass solar modules.

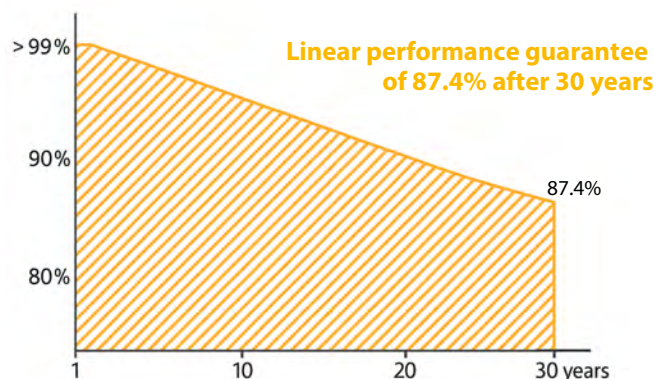



Note: mm[in]

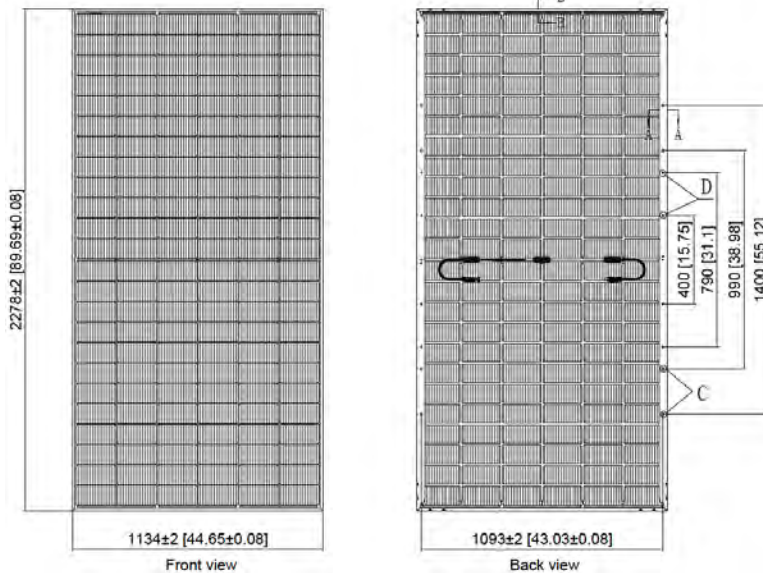


## PHYSICAL SPECIFICATIONS

Module dimensions	2278 x 1134 x 35 mm
Weight	32.7 kg
Frame	Black anodized aluminum profile
Frontside	AR-coating semi-toughened glass, 2 mm
Embedding material	EVA
Backside	White-glazed & semi-toughened glass, 2 mm
Solar cells	144 monocrystalline N-type bifacial half-cells
Bifaciality	80 % ± 10 %
Junction box(es)	IP68, 3 bypass diodes
Cable & connector	1x4 mm <sup>2</sup> , 1300 mm, Stäubli MC4/EVO2A

## BAUER SOLARTECHNIK COMMERCIAL

BS-144M10HBW-GG 575 - 585 W

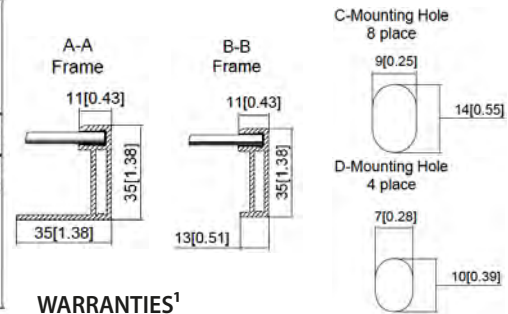

## WARRANTIES<sup>1</sup>

30 year product warranty  
30 year performance guarantee

## OPERATING CONDITIONS

Operating temperature	-40 to 85°C
Static load	5400 Pa (snow/wind/ice)
Hail test	Ø 25 mm at ~ 23 m/s

## CERTIFICATION

IEC 61215, 61730-1/2, 61701 (Salt mist), 62716 (Ammonia)  
CSA; Fire Class: A (USA); UL Type 29

## PACKAGING

Modules per pallet	30
Pallets/modules per truck	20/600

## ELECTRICAL CHARACTERISTICS<sup>2</sup>

		BS-575-144M10HBW-GG	BS-580-144M10HBW-GG	BS-585-144M10HBW-GG
Maximum power	P <sub>max</sub> (W)	575	580	585
Power output tolerance	P <sub>max</sub> (%)	0 ~ +3	0 ~ +3	0 ~ +3
Open circuit voltage	V <sub>oc</sub> (V)	51.26	51.44	51.65
Short circuit current	I <sub>sc</sub> (A)	14.31	14.37	14.44
Voltage at maximum power	V <sub>mpp</sub> (V)	42.53	42.70	42.92
Current at maximum power	I <sub>mpp</sub> (A)	13.54	13.60	13.65
Module efficiency	η <sub>m</sub> (%)	22.26	22.45	22.65
Bifaciality performance increase*	10 % P <sub>mpp</sub> (W)	632.5 (+57.5)	638 (+58)	643.5 (+58.5)
	20 % P <sub>mpp</sub> (W)	690 (+115)	696 (+116)	702 (+117)
	30 % P <sub>mpp</sub> (W)	747.5 (+172.5)	754 (+174)	760.5 (+175.5)
Nominal operating cell temperature	NOCT (°C)	45 +/- 2		
Temperature coefficient of V <sub>oc</sub>	T <sub>k</sub> (V <sub>oc</sub> )	-0.26 %/°C		
Temperature coefficient of I <sub>sc</sub>	T <sub>k</sub> (I <sub>sc</sub> )	+0.046 %/°C		
Temperature coefficient of P <sub>mpp</sub>	T <sub>k</sub> (P <sub>mpp</sub> )	-0.30 %/°C		
Maximum system voltage DC (TÜV)	(V)	1500		
Maximum series fuse rating	(A)	30		

\*depending on Albedo and irradiation conditions at installation site

<sup>1</sup>Nominal value is specified in the written warranty conditions. A possible light-induced degradation in performance is not taken into account.

<sup>2</sup>Values under Standard Test Conditions (STC): air pressure 1.5 AM, irradiance 1000 W/m<sup>2</sup>, cell temperature 25°C. STC measuring tolerance: ±3 % (P<sub>max</sub>), ±10 % (V<sub>max</sub>, I<sub>mpp</sub>, V<sub>OC</sub>, I<sub>SC</sub>). The beneficiary under the reinsurance policy is solely Bauer Solar Engineering GmbH. Please contact us to get information on how this insurance coverage benefits you as a customer.

Note: please read the installation manual before using this product. Subject to change.

© 2024 Bauer Solar Engineering GmbH. Effective: 01/12/24.